


SOLIKOMBI

- Hygienic usage water with stainless heat exchanger
- Due to flexible heat exchanger, limeless usage
- No anode bar
- Pressurised usage water
- Unpressurised tank
- Lightweight, aesthetic appearance, long life and maintenance-free
- Applicable to heat pump and hybrid systems
- Optional electrical heater
- Minimum heat loss with polyurethane isolation
- Easy montage due to small size
- Applicable to solar energy systems
- 5 year warranty

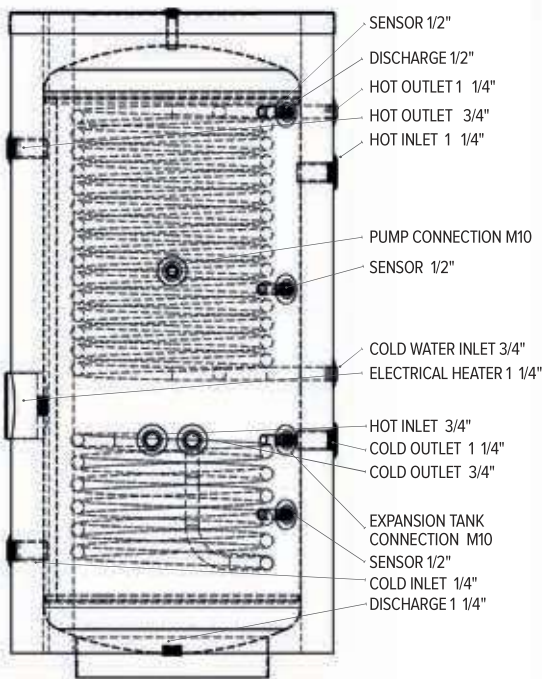

TECHNICAL SPECIFICATIONS

	SOLIKOMBI 300	SOLIKOMBI 500	SOLIKOMBI 800	SOLIKOMBI 1000
Product Code	MA- 0367	MA- 0494	MA- 0608	MA- 0495
Height(mm)	1770	1653	1733	2033
Diameter(mm)	542	750/807	1017	1017
Net Weight(kg)	85	100	175	190
Volume/ cubage(lt)	245	454	800	970
Insulate	50 mm /40 kg/m ³	50 mm /40 kg/m ³ - 80 mm /18 kg/m ³	80 mm /14 kg/m ³	80 mm /14 kg/m ³
Insulating Material	Polyurethane	18 Density Foam Rubber / Polyurethane	18 Density Foam Rubber	18 Density Foam Rubber
Outer Cylinder Materials	Electrostatic Powder Painted ST 37 Steel	Electrostatic Powder Painted ST 37 Steel / Leagherette Jacket	Leagherette Jacket	Leagherette Jacket
Materials of Serpantina	AISI 316 L Stainless Steel	AISI 316 L Stainless Steel	AISI 316 L Stainless Steel	AISI 316 L Stainless Steel
Number of Serpantina	2	2	2	2
1. Serpantina Area (m ²)	3,83	4,81	7,23	8,76
2. Serpantina Area (m ²)	1,75	1,75	2,19	2,62