


SOLITANK

Hygienic usage water with stainless steel heat exchanger
 Due to flexible heat exchanger, limeless usage
 No anode bar
 Pressurised usage water
 Unpressurised tank
 Lightweight, aesthetic appearance, long life and maintenance-free
 Applicable to heat pump and hybrid systems
 Optional electrical heater
 Minimum heat loss with polyurethane isolation
 Easy montage due to small size
 Applicable to solar energy systems
 5 year warranty

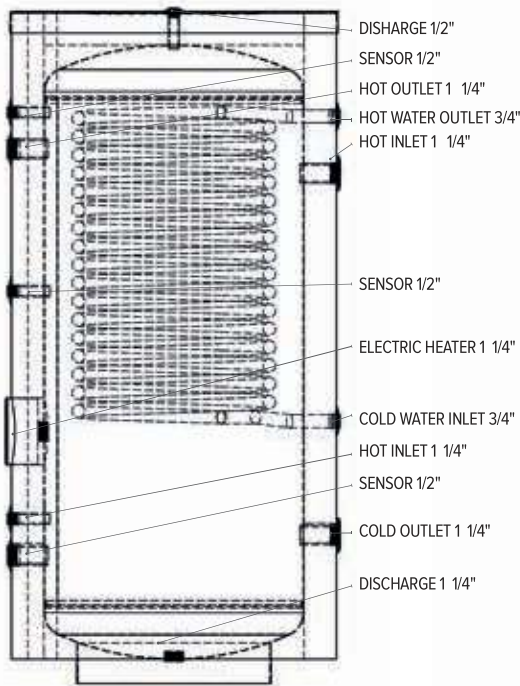

TECHNICAL SPECIFICATIONS

	SOLITANK 200	SOLITANK 300	SOLITANK 500	SOLITANK 1000
Product Code	MA-0001	MA-0002	MA- 0492	Ma- 0493
Height(mm)	1245	1770	1653	2033
Diameter(mm)	542	542	750/807	1017
Net Weight(kg)	75	85	100	190
Volume/ cubage(lt)	170	245	454	970
Insulate	50 mm /40 kg/m ³	50 mm /40 kg/m ³	50 mm /40 kg/m ³ 80 mm /18 kg/m ³	80 mm /18 kg/m ³
Insulating Material	Polyurethane	Polyurethane	Polyurethane / 18 Density Foam Rubber	18 Density Foam Rubber
Outer Cylinder Materials	Electrostatic Powder Painted ST 37 Steel	Electrostatic Powder Painted ST 37 Steel	Electrostatic Powder Painted ST 37 Steel / Leagherette Jacket	Leaherette Jacket
Materials of Serpantina	AISI 316 L Stainless Steel	AISI 316 L Stainless Steel	AISI 316 L Stainless Steel	AISI 316 L Stainless Steel
Number of Serpantina	1	1	1	1
1. Serpantina Area (m ²)	3,83	3,83	5,48	8,76